



COMMERCIAL • INDUSTRIAL • RESIDENTIAL

SharkSkin®

TRANSLUCENT EXTERIOR ALKYD/OIL HYBRID WOOD STAIN




- Long-Term Durability
- Excellent Water Repellency
- Exceptional UV Protection
- Protects from Peeling, Blistering, Cracking
- Mildew Resistant

694030/CEDAR
694031/HONEY MAPLE
694032/TEAK
694033/ARBUTUS
694034/IRONWOOD
694035/WEATHERED FIR

Translucent Stain Finish Designed to Enhance the Natural Beauty of Wood With the Ultimate in Weather & UV Protection, Toughness & Durability!

Note: The color samples shown above are representations of the tinted stains. The actual color of the stain will vary based on the choice of stain and the condition & porosity of the surface to which the stain will be applied. To ensure satisfaction, always test a small amount of the stain on an inconspicuous area of the surface to be finished for the desired color/finish before proceeding.

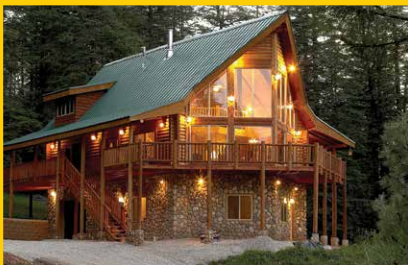

The Rodda Paint Difference



SharkSkin Translucent Stain Finish Adds Glamor & Warmth to the Natural Beauty of Wood With The Ultimate In Weather & UV Protection, Toughness and Durability!

Description

SharkSkin Translucent Stain is a Premium quality, Exterior stain that is designed for weather extremes, from sun-drenched summers to tough winters. Its Alkyd/Oil hybrid and Trans Oxide pigmented formulation provides a deep penetrating & long lasting decorative finish - specialized vegetable oils provide maximum penetration, the alkyd resin component delivers the ultimate in weather protection, wear resistance, toughness & durability while the Trans Oxide pigments absorb the sun's UV rays to protect the wood and provide a translucent finish that will accentuate the natural beauty of any wood substrate.

SharkSkin Translucent Stain is a fast drying, low sheen product that is formulated to provide outstanding penetration, excellent water-resistance & repellency, superior dirt pick-up resistance with exceptional UV protection & durability while affording an enhanced resistance to cracking, peeling and blistering.

The unique combination of Mildewcides and Mold inhibitors in SharkSkin Translucent Stain, compared to conventional translucent stains, increases the protection against mold, mildew & algae growth on the surface of the stain.

Available in 6 factory tinted Colors, the SharkSkin Translucent stain finish adds glamour & warmth to the natural beauty of wood, allowing the grain, texture, and color variations of the wood to show through. SharkSkin Translucent Stain can be used on new or previously stained surfaces to protect and keep surfaces looking great while extending the time between repaints.

Features

- Long-Term Durability
- Mildew Resistant
- Dirt Pick-up Resistant
- Excellent Water Repellency
- Exceptional UV Protection
- Protection from Peeling, Blistering, Cracking

Recommended Uses

- Exterior Wood Decks, Patios, Stair Treads or Other Horizontal Surfaces
- Structural Wood Components, Timbers Frames, Glulam, CLT, Trusses, MPP (Mass Plywood Panels)
- Fences, Deck Railings, Soffits, Trim, Furniture, Lattice, Spindles
- Lap, Board & Bat and Shingle/Shake Sidings
- Uniquely effective on Rough-sawn surfaces

Ideal For

- Commercial
- New Home Construction
- Multi-Family
- Maintenance
- Residential
- Wood Landscape Features such as gazebo, fence, gate, etc.
- Log Homes

SharkSkin® TRANSLUCENT STAIN Technical Data

Sheen	Gloss Level	Colors	VOC	Volume Solids	Film Thickness	Reducers	Minimum Application Temperature	Application and Curing at 77F and 50% Relative Humidity	Application Recommendation
Flat	n/a	Cedar	< 485 g/L	33%	Minimal, As needed	None	50F	<p>Dry Time is Approximately 24 hours depending on temperature and humidity.</p> <ul style="list-style-type: none"> • Allow 24 hours before exposing the freshly stained surface to light foot traffic • Allow 48 hours of dry time before placing furniture on decks • Allow 7 days before washing <p>Note: Film thickness, temperature, humidity and air movement will affect dry/cure times - Cooler temperatures, higher humidity, or excess film build will extend dry times. Apply only in dry conditions.</p>	<p>Natural Bristle Brush</p> <p>3/8"-3/4" Synthetic Lint Free Roller Cover depending on the roughness of the surface to be coated</p> <p>1,000-1,500 psi Pressure Airless Spray with .013 - .015 tip; Back roll/brush with spray application</p>
		Honey Maple							
		Teak							
		Arbutus							
		Ironwood							
		Weathered Fir							

For additional details please see your Rodda Representative for the Technical Data Sheet (TDS) for this product.

Made in the Northwest, since 1932!



6107 N. Marine Drive, Portland, OR
 503-521-4300 | 800-452-2315
 RoddaPaint.com | Follow Us

Ask your Rodda Paint representative about the Cascadia Color Collection, a nature inspired color palette.

