

Rodda
PAINT

COMMERCIAL • INDUSTRIAL • RESIDENTIAL

SharkSkin®

THE ULTIMATE IN WATER-REPELLENT SCUFF-RESISTANT PROTECTION

Deck & Siding

SOLID HIDE ACRYLIC URETHANE WOOD STAIN

- Long-Term Durability
- Excellent Water Repellency
- Superior UV Protection
- Scuff-Resistant Finish
- Designed for Northwest Weather Extremes
- Outstanding Adhesion



EXCEPTIONAL 6/20 YEAR GUARANTEE!





The Rodda Paint Difference

SharkSkin Stains, The Ultimate in Deck , Fence, Siding Protection! - Designed Specifically for Weather Extremes from Sun-drenched Summers to Tough Winters, SharkSkin Deck & Siding Stain Provides Superior Adhesion, Durability and Resistance to Cracking, Peeling or Blistering.


Description:

Inspired by the structure of a shark's skin, tough for protection and smooth for efficiently gliding through water, SharkSkin Solid Hide Stain is developed with the industry's latest hybrid waterborne technology - cross-linking Acrylic & Urethane resins with Linseed oil to provide the ultimate in weather protection and scuff & mar resistance from foot traffic.

Formulated to withstand weather extremes with antimicrobial inhibitors and fewer volatile solvents compared to conventional solid hide stains, SharkSkin delivers superior adhesion, durability and color retention to new/previously painted surfaces while protecting against mold, mildew & algae growth on the surface of the stain - Keeping surfaces looking great for years and extending time between repaints!

SharkSkin Solid Hide Stain spreads to a smooth, uniform, flat finish that masks imperfections and unwanted grain/color variations. The water-repellent film creates a barrier against wind-driven rain, while remaining flexible with seasonal temperature changes. It can be tinted to most any exterior color and cleans-up easily with water - Homeowners and Professionals can be confident that decks/siding painted with SharkSkin will withstand years of foot traffic and weather while remaining protected from cracking, peeling or blistering.

Durability (Urethane)
Weatherability
(100% Acrylic Resin)
Penetration (Linseed Oil)

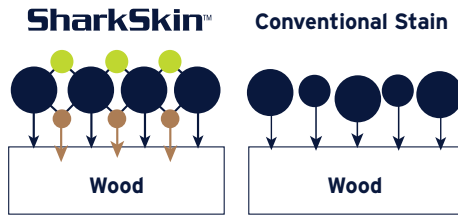

LONGTERM DURABILITY WITH OUTSTANDING ADHESION & SCUFF-RESISTANCE

Hybrid Fusion of Acrylic & Urethane resins with Linseed Oil provides superior protection, adhesion & flexibility during seasonal changes and the ultimate in durability and water-resistance from foot traffic & weather.



SUPERIOR WATER AND UV PROTECTION

4X greater UV & weather protection than conventional stains. Premium Acrylic resin ensures rain & moisture stays away from the wood allowing the wood to naturally expand and contract with the season while antimicrobial inhibitors protect against mold, mildew and algae growth on the surface of the stain so decks and siding stay looking great for years.



EXCEPTIONAL 6/20 YEAR GUARANTEE

Guaranteed for 6 years on horizontal deck structures and 20 years on vertical siding against manufacturer's defects, cracking, peeling or blistering when properly applied in accordance with the label instructions.



EXCELLENT APPLICATION PROPERTIES

Formulated as a heavier-body coating to provide superior hide, flow & leveling for the applicator, its rich, creamy texture hides the natural color of wood, masking imperfections and unwanted grain/color variations to provide a smooth, painted look.

Recommended Uses:

- Ideal for exterior wood decks, patios, stair treads or other horizontal surfaces
- Also recommended for wood, composite or cement board siding
- Great for wood fences, gazebos & deck railings, soffits, trim, exterior stucco, masonry or other cementitious surfaces
- Can also be used on properly prepared and primed previously painted surfaces

SharkSkin® Technical Data

Sheen	Gloss Level	Bases	VOC	Volume Solids	Film Thickness		Reducers	Minimum Application Temperature	Application and Curing at 77F and 50% Relative Humidity	Application Recommendation
					Wet	Dry				
Gloss	3	White	< 155 g/L	37% (Varies by Base and Color)	3.9 - 6.8 mils	1.5 - 2.5 mils	Not normally recommended. Reduce sparingly with water for spray applications	50F	Dry to Touch: 45 min Dry to Recoat: 4-6 hrs	Nylon/Polyester Brush 3/8" to 3/4" Nap Synthetic Roller Cover 2000 psi Pressure Airless Spray with .013 - .015 tip 1.3 Cap pressure, 10-20 psi HVLP Spray
		Deep								
		Neutral								

For additional details please see your Rodda Representative for the Technical Data Sheet (TDS) for this product.

Made in the Northwest, since 1932!



6107 N. Marine Drive, Portland, OR
503-521-4300 | 800-452-2315
RoddaPaint.com | Follow Us

Ask your Rodda Paint representative about the Cascadia Color Collection, a nature inspired color palette.

