


COMMERCIAL • INDUSTRIAL • RESIDENTIAL

Sharkskin® Semi-transparent

EXTERIOR ALKYD/OIL HYBRID WOOD STAIN

- Long-Term Durability
- Excellent Water Repellency
- Exceptional UV Protection
- Protects from Peeling, Blistering, Cracking
- Mildew Resistant

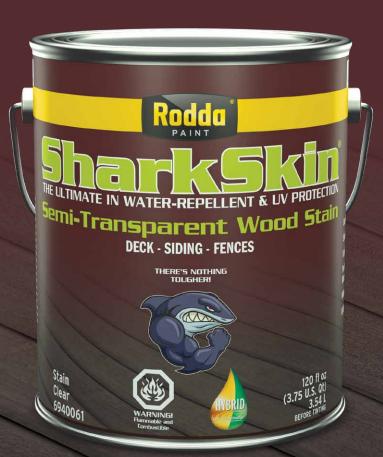

Lightly Pigmented Stain Finish Designed to Enhance the Natural Beauty of Wood With the Ultimate in Weather & UV Protection, Toughness & Durability!





The Rodda Paint Difference

Sharkskin Semi-Transparent Stain, a Lightly Pigmented Finish Enhancing The Natural Beauty Of Wood With The Ultimate In Weather & UV Protection, Toughness and Durability!

Description

SharkSkin Semi-Transparent Stain is a Premium quality, Exterior wood stain that is designed for weather extremes, from sundrenched summers to tough winters. Its Alkyd/Oil hybrid formulation provides a deep penetrating and long lasting decorative finish - The specialized vegetable oils provide maximum penetration while the alkyd resin component delivers the ultimate in weather protection, wear resistance, toughness and durability.

SharkSkin Semi-Transparent Stain is a fast drying, low sheen product that is formulated to provide outstanding penetration, excellent water-resistance & repellency, superior dirt pick-up resistance with exceptional UV protection & durability while affording an enhanced resistance to cracking, peeling and blistering.

The unique combination of Mildewcides and mold inhibitors in SharkSkin Semi-Transparent Stain, compared to conventional semitransparent stains, increases the protection against mold, mildew & algae growth on the surface of the stain.

Tinted with Zero VOC universal colorants, the lightly pigmented finish of SharkSkin Semi-Transparent stain enhances the natural beauty of wood by allowing the grain, texture and color variations of the wood to show through. SharkSkin Semi-Transparent Stain can be used on new or previously stained surfaces to protect and keep surfaces looking great while extending the time between repaints.

Features

- Long-Term Durability
- Mildew Resistant
- Dirt Pick-up Resistant
- Excellent Water Repellency
- Exceptional UV Protection
- Protection from Peeling, Blistering, Cracking

Recommended Uses

- Exterior Wood Decks, Patios, Stair Treads or Other Horizontal Surfaces
- Structural Wood Components, Timbers Frames, Glulam, CLT, Trusses, MPP (Mass Plywood Panels)
- Fences, Deck Railings, Soffits, Trim, Furniture, Lattice, Spindles
- Lap, Board & Bat and Shingle/Shake Sidings
- Uniquely effective on Rough-sawn surfaces

Ideal For

- Commercial
- New Home Construction
- Multi-Family
- Maintenance
- Residential
- Wood Landscape Features such as gazebo, fence, gate, etc.
- Log Homes

Sheen	Gloss Level	Bases	voc	Volume Solids	Film Thickness	Reducers	Minimum Application Temperature	Application and Curing at 77F and 50% Relative Humidity	Application Recommendation
Flat	n/a	Clear	< 525 g/L	33%	Minimal, As needed	None	SOF	Dry Time is Approximately 24 hours depending on temperature and humidity. • Allow 24 hours before exposing the freshly stained surface to light foot traffic • Allow 48 hours of dry time before placing furniture on decks • Allow 7 days before washing Note: Film thickness, temperature, humidity and air movement will affect dry/cure times - Cooler temperatures, higher humidity, or excess film build will extend dry times. Apply only in dry conditions.	Natural Bristle Brush 3/8"-3/4" Synthetic Lint Free Roller Cover depending on the roughness of the surface to be coated 1,000-1,500 psi Pressure Airless Spray with .013015 tip; Back roll/brush with spray application

SharkSkin[®] SEMI-TRANSPARENT STAIN Technical Data